

VS82/VS84/VS88

2/4/8 Port Video Splitter

Duplicate and boost the video signal from 1 source to 2/4/8 outputs

The VS82 / VS84 / VS88 Video Splitters duplicate the video signal from an input source (i.e. a computer) and route it to up to 2 / 4 / 8 display devices (monitors, projectors, etc.). However, they go beyond being merely duplicators, in that they also enhance the video signals over distances up to 65 meters. Furthermore, they can be cascaded three levels to additional ATEN video splitters to support numerous display devices. And they mount inconspicuously on the wall or out of sight.








Features

- One video input to 2/4/8 video outputs
- Cascadable to 3 levels provides up to 8/64/512 video signals
- Supports up to 250 MHz bandwidth
- Long distance transmission up to 65 m (210')
- High video resolution up to 1920 x 1440
- DDC, DDC2, DDC2B Compatible (Port 1 only)
- Compact design with convenient topside connection, lays flat on a desktop or mounts on the wall
- Supports VGA, XGA, SVGA, UXGA and multisync monitors
- *Video content sent over very long distance using a VGA cable might result in slight degradation of the video signal and quality.

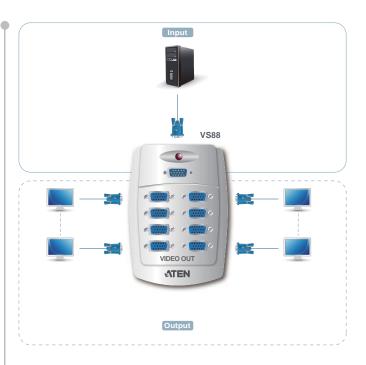

Specification

Function		VS82	VS84	VS88
Display Connections		2	4	8
Connectors	Video In	1 x HDB-15 Male (Blue)		
	Video Out	2 x HDB- 15 Female (Blue)	4 x HDB- 15 Female (Blue)	8 x HDB- 15 Female (Blue)
	Power	1 x DC Jack		
LEDs	Power	1 (Orange)		
Vidoe Bandwidth		250 MHz		200 MHz
Video		1920 x 1440 @ 60Hz		1600 x 1200 @ 60Hz
Signal Range		Up to 65m (210')		
Power Consumption		DC9V, 1.35W (Max.)	DC 9V, 2.25W (Max.)	DC 9V, 2.5W (Max.)
Environment	Operating Temp.	0-50°C		
	Storage Temp.	-20-60°C		
	Humidity	0-80% RH, Non-condensing		
Physical Properties	Housing	Plastic		
	Weight	0.14kg	0.15kg	0.22kg
	Dimension (L x W x H)	8.76 x 11.46 x 3.33 cm	8.84 x 11.88 x 3.33 cm	9.79 x 15.59 x 3.33 cm

^{*} The specifications and pictures are subject to change without notice.

ATEN International Co., Ltd.

Printed 05/2014 V6.0



